



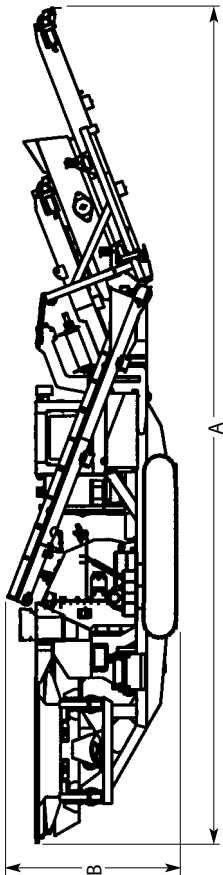

FT4240CC & FT4250CC SPECIFICATIONS

The track mounted FT4240CC and FT4250CC feature the Andreas Series Horizontal Shaft Impact Crusher. The FT4250CC provides a feed opening of 42" x 50", and the FT4240 offers a 42" x 40" crusher feed opening. Both plants are equipped with the standard Overload Protection System (OPS). Delivering dramatically superior performance with an easily adjustable interface RAP producers will benefit from the closed circuit configuration, complete with a screen and recirculating conveyor.



DIMENSIONS				
	FT4240CC		FT4250CC	
	TRANSPORT	OPERATING	TRANSPORT	OPERATING
A (OVERALL LENGTH)	66 ft 3 in / 20.202 m	66 ft 3 in / 20.202 m	67 ft 8 in / 20.630 m	67 ft 8 in / 20.630 m
B (OVERALL HEIGHT)	11 ft 5 in / 3.480 m	13 ft 8 in / 4.166 m	13 ft 1 in / 3.988 m	13 ft 1 in / 3.988 m
C (OVERALL WIDTH)	11 ft 8 in / 3.556 m	14 ft / 4.267 m	12 ft / 3.658 m	15 ft 6.25 in / 4.731 m
WEIGHT	92,500 lbs / 41957 kg		117,500 lbs / 53297 kg	
FEEDER				
SIZE	40 in x 14 ft / 1016 mm x 4.267 m		50 in x 15 ft / 1270 mm x 4.572 m	
GRIZZLY TYPE / SIZE	Straight - 40 in x 4 ft / 1016 mm x 1219 mm		Step Deck - 50 in x 5 ft / 1270 mm x 1524 mm	
STANDARD GRIZZLY BAR SPACING (NOMINAL)	2.50 in / 622 mm		2.50 in / 622 mm	
HOPPER VOLUME w/o EXT.	5.25 cu/yds / 4.01 cu/m		6.50 cu/yds / 4.9375 cu/m	
HOPPER VOLUME with OPTIONAL EXT.	6.25 cu/yds / 4.75 cu/m		7.50 cu/yds / 5.75 cu/m	
HYDROSTATIC DRIVE HSI CRUSHER				
FEED OPENING	36 in x 40 in / 914 mm x 1016 mm		36 in x 50 in / 914 mm x 1270 mm	
HYDRAULIC DRIVE UNDER SCREEN CONVEYOR				
SIZE (L X W)	22 ft x 36 in / 6.710 m x 914 mm		23 ft x 48 in / 7.010 m x 1219.20 mm	
DISCHARGE HEIGHT	10 ft / 3.048 m		10 ft / 3.048 m	
HYDRAULIC DRIVE CLOSED CIRCUIT CONVEYOR				
SIZE (L X W)	27 ft x 36 in / 6.710 m x 914 mm		23 ft x 48 in / 7.010 m x 1219.20 mm	
DISCHARGE HEIGHT	10 ft / 3.048 m		10 ft / 3.048 m	
HYDRAULIC DRIVE UNDER CRUSHER CONVEYOR				
SIZE (L X W)	40 ft x 36 in / 12.190 m x 914 mm		40 ft x 48 in / 12.190 m x 1219.20 mm	
DISCHARGE HEIGHT	10 ft / 3.048 m		10 ft / 3.048 m	
TRACKS				
LENGTH	14 ft 10 in / 4.521 m		14 ft 10 in / 4.521 m	
SHOE WIDTH	20 in / 508 mm		24 in / 609.60 mm	
ENGINE				
TYPE	CAT Diesel, Tier III		CAT Diesel, Tier III	
RATING	385 hp / 287 kw		440 hp / 328 kw	
FUEL CAPACITY	150 gal / 568 L		180 gal / 681 L	
HYDRAULIC				
OIL CAPACITY	200 gal / 757 L		200 gal / 757 L	
TWO OFF-PLANT STACKER CIRCUITS	12 gpm and 20 gpm / 45 L and 76 L		12 gpm and 20 gpm / 45 L and 76 L	
PERFORMANCE				
DUST SUPPRESSION SYSTEM	Standard		Standard	
MAXIMUM FEED SIZE	21 in / 533 mm		21 in / 533 mm	
CAPACITY UP TO	325 tph / 295 mtpg		400 tph / 363 mtpg	
AVERAGE FUEL CONSUMPTION	10 gal/hr / 38 L/hr		12 gal/hr / 45 L/hr	
MAXIMUM OPERATING SLOPE				
SIDE-TO-SIDE / FRONT-TO-BACK	1% grade / 3% grade		1% grade / 3% grade	